


# DATA PAQ Coilpaq

...the coil coating temperature profiling solution

The Datapaq CoilPaq system is used to measure the air surface temperature of the coil strip at various points across its width as it is fed through the oven.

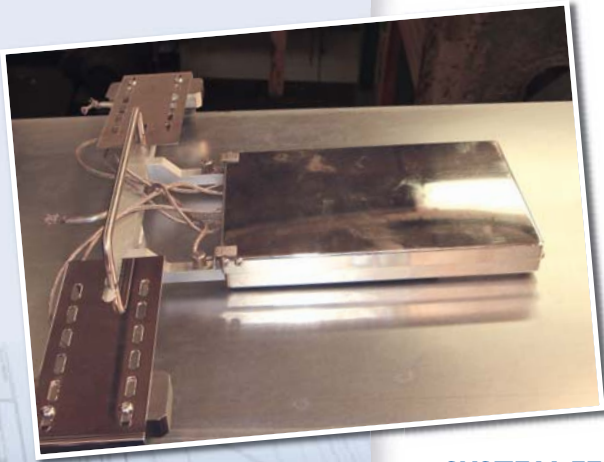

The design of the CoilPaq allows you to place this instrument on the moving coil without stopping the line.

Precise temperature readings begin when the start button is pushed or user-determined time or temperature triggers are reached. Readings are taken as frequently as every 0.1 second for the best possible resolution.

When the run is complete, the data is downloaded onto Datapaq's powerful Insight software. Fast and accurate analysis of the curing cycle with full documentation is generated in seconds.

## SYSTEM FEATURES

- Six measurement points (3 air, 3 surface)
- Proven on coil coating lines running at over 600 ft (183 m) per minute
- Sampling intervals from 0.05 seconds to 10 minutes
- Data logger accuracy of  $\pm 0.9^{\circ}\text{F}/0.5^{\circ}\text{C}$
- Range of arm sizes to suit all coil widths
- Works on both aluminum and steel
- Starts automatically upon entering the oven (temperature trigger)
- Light and compact
- Easy grab handle
- Coil edge guide rails (optional)



## SYSTEM BENEFITS

- Monitors the product coating cure and checks that it is to the manufacturer's specification
- Confirms uniform temperature across the entire width of the coil strip
- Find and prevent problems due to improper coil temperatures; thus minimizing rejects and production downtime
- Surface and air thermocouples are positioned in the center and sides of the coil to measure uniformity across the strip
- Allows fast set up after line maintenance, breakdown or coil/coating change
- No need to stop or slow the line; the CoilPaq is placed on the moving coil
- Complete documentation is automatically generated for ISO9000

**DATA PAQ**

[www.datapaq.com](http://www.datapaq.com)

# Technical Specifications

## Q18 DATA LOGGER





<b>Model:</b>	DQ1860
<b>No. of Channels:</b>	6
<b>Sampling Interval:</b>	0.05 seconds to 10 minutes
<b>Accuracy:</b>	±0.9°F / ±0.5°C
<b>Resolution:</b>	0.1°F / 0.1°C
<b>Maximum internal operating temperature:</b>	185°F / 85°C
<b>Temperature Range:</b>	-328°F to 2498°F / -200°C to 1370°C
<b>Memory:</b>	18,000 data points per channel
<b>Data collection start:</b>	Start/stop buttons, time or temperature trigger
<b>Battery:</b>	NiMH rechargeable
<b>Battery Charging:</b>	Full charge in less than 2 hours
<b>Battery Life:</b>	60 hours - Sample interval of 5 seconds at 77°F (25°C)

## SOFTWARE FEATURES


Datapaq's Insight software is a powerful software package that quickly converts raw data into meaningful information. Complete documentation is generated in seconds with a detailed analysis of the curing cycle.

- Wizard driven for ease-of-use
- DatapaqValue, Reference and Tolerance Curves, SPC, and Bakechart analysis
- Time at Temp/Peak Temp shows time spent above pre-determined temperature thresholds and the maximum temperature reached
- Analysis alarms for when the process is out of tolerance
- Import and export data into spreadsheets for further analysis
- Notification for logger recalibration

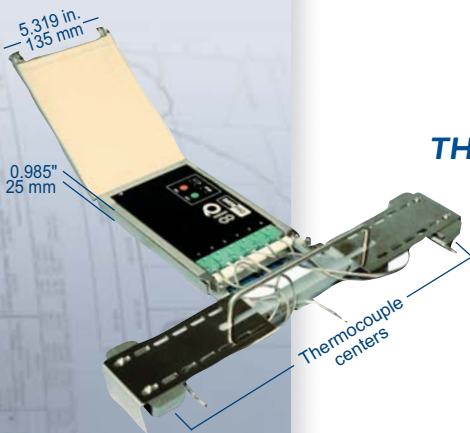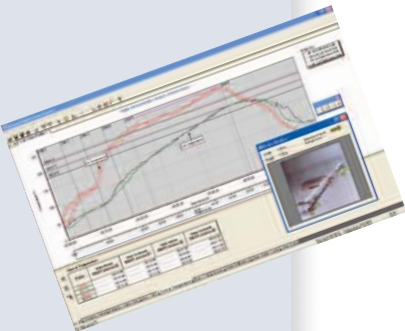

## THERMAL BARRIER CL006 I

- Thermal duration: 10 minutes at 400°F (200°C), 8.5 minutes at 575°F (300°C)
- Weight of system including standard arms = 4lbs (1.8kg)
- Weight of system including standard arms and data logger = 4.6lbs (2.1 kg)
- Overall width with standard arms = 38.1 in (967mm) (see below for details on other arm sizes)



SPAN		ARM ASSEMBLY PART NUMBER		THERMOCOUPLE PART NUMBER	
Overall Width	Thermocouple Centers	Left	Right	Air	Surface
24.4 in. (621 mm)	22.5 in. (572 mm)	PA0402	PA0403	PA0431	PA0441
30.5 in. (775 mm)	28.6 in. (726 mm)	PA0406	PA0407	PA0321	PA0326
38.1 in. (967 mm)	36.1 in. (918 mm)	PA0400	PA0401	PA0430	PA0440
44.8 in. (1137 mm)	42.8 in. (1088 mm)	PA0408	PA0409	PA0433	PA0443
48.1 in. (1221 mm)	46.1 in. (1172 mm)	PA0404	PA0405	PA0432	PA0442
54.8 in. (1391 mm)	52.8 in. (1342 mm)	PA0410	PA0411	PA0434	PA0444



**North and South America**  
 DATAPAQ Inc.  
 187 Ballardvale Street  
 Wilmington, MA 01887  
 Tel: 1 (978) 988-9000  
 Fax: 1 (978) 988-0666  
 e-mail: reflow@datapaq.com

**Europe and Asia**  
 DATAPAQ Limited  
 Deanland House, 160 Cowley Road,  
 Cambridge CB4 0GU, UK  
 Tel: +44 (0)1223 423 141  
 Fax: +44 (0)1223 423 306  
 e-mail: sales@datapaq.co.uk